

Fluid motion recovery by coupling dense and parametric vector fields

Étienne Mémin and Patrick Pérez

IRISA/INRIA

Campus de Beaulieu, 35042 Rennes Cedex, France

memin@irisa.fr, perez@irisa.fr

Abstract

In this paper we address the problem of estimating and analyzing the motion in image sequences that involve fluid phenomena. In this context standard motion estimation techniques are not well adapted and more dedicated approaches have to be designed. In this prospect, we propose to estimate in a joint and cooperative way a dense motion field and a peculiar parametric representation of the flow. The parametric model issues from an extension of Rankine vortex model and includes a laminar flow field. Dense and parametric fields are estimated by minimizing a robust global objective function thanks to a specific alternate scheme. The method has been validated on different kinds of meteorological image sequences.

1 Background: Fluid Motion Estimation

In a number of domains, image sequences that involve fluid phenomena, have to be analyzed: In environmental sciences (oceanography, meteorology, climatology, etc.), ocean and atmosphere evolutions are observed via satellite sensors [5, 9]; In medical imaging, blood flow can be monitored by angiography [14]; In the field of fluid mechanics, aero- and hydro-dynamics experiments now routinely produce lots of video data [7, 10, 15]. In all these domains of applications, camera offers in a versatile and non-intrusive way, huge amounts of spatio-temporal data, as opposed to *in situ* measurement techniques that are often complex, very specific, intrusive, and that only provide with sparse data. With these latter techniques, however, sought quantities are directly measured with dedicated probes, whereas, within image sequences, the relevant information has to be extracted from the luminance data.

The analysis of motion in such sequences is particularly challenging due to the great deal of spatial and temporal distortions that luminance patterns exhibit in imaged fluid phe-

nomena. Standard techniques from Computer Vision, originally designed for quasi-rigid motions with stable salient features, are not well adapted in this context. The design of alternate approaches dedicated to fluid motion thus constitutes a widely open domain of research. Our work is a contribution in this direction.

As in standard motion analysis, two types of motion information can be sought. First, *dense velocity* (or *displacement*) fields [5, 9] constitute precious sources of information which can serve either as validation basis, or as input data for numerical models (e.g., in short-term weather prediction). They are also used for visualization purposes, and allow to compute other quantities of interest, such as the vorticity of the flow [15]. Second, some salient structures may be sought. *Vortices* [14, 16], and more generally *singular points* [5, 7, 10] are kinematic entities of particular interest: they provide a compact and relevant representation of fluid flows [7], they retain key information for the understanding of phenomena (e.g., vortices in study of turbulence [15], depressions in meteorology [9]), and they provide tokens for tracking purposes [10]. Such entities can be extracted *a posteriori* from estimated velocity fields [5, 7, 14, 16]. They can also be recovered directly from images [7, 10].

We suggest here that both types of information should be extracted in a joint and cooperative way. To this end we introduce, on the basis of a joint estimation segmentation approach [12], a coupled approach which mixes the optical flow technique proposed in [13] with an original non-linear parametric flow modeling based on vortices, sources and sinks.

2 Dense/Parametric Robust Modeling

Dense motion estimation aims at estimating a velocity map $w = \{w_s, s \in S\}$ at each point of the rectangular pixel lattice S , based on brightness function $f(t) = \{f(s, t), s \in S\}$ at two consecutive instants t and $t+1$. Assuming temporal *constancy* of the brightness function, standard optic-flow

estimation rely on a differential equation known as *optic-flow constraint equation* (OFCE):

$$\nabla f(s, t)^T \mathbf{w}_s + f_t(s) = 0$$

where ∇f stands for the spatial gradient of f and $f_t(s, \mathbf{w}_s) \triangleq f(s, t+1) - f(s, t)$ denotes the finite difference approximation of the temporal derivative. This equation issues from a linearization of the brightness constancy assumption. It may also be seen as the material derivative of f (i.e., the rate of change of f as observed when moving with point s).

The OFCE being known to be not valid in general for large displacements (the linearity domain of the luminance function is drastically reduced for long range displacements, as well as at sharp edge locations) an incremental version of this equation is usually considered. This technique which may be related to non-linear least squares *Gauss-Newton* method [1, 11] is generally used in combination with a standard multiresolution setup [2, 6]. In the following, we shall assume to work at a given resolution of such a pyramidal structure. However, one has to keep in mind that the expressions and computations are meant to be reproduced at each resolution level according to a coarse-to-fine strategy.

Let us now assume that a rough estimate $\mathbf{w} = \{\mathbf{w}_s, s \in S\}$ of the unknown velocity field is available (e.g., from an estimation at lower resolution or from a previous estimation). Based on a linearization of the constancy brightness assumption from time t to $t+1$ around \mathbf{w} , a small *increment field* $\mathbf{d}\mathbf{w} \in \Omega \subset (\mathbb{R} \times \mathbb{R})^S$ can be estimated as:

$$\arg \min_{\mathbf{d}\mathbf{w}} H_1(\mathbf{d}\mathbf{w}; f, \mathbf{w}) + \alpha H_2(\mathbf{d}\mathbf{w}; \mathbf{w}), \quad (1)$$

with [2, 11]:

$$H_1 \triangleq \sum_{s \in S} \rho_1 [\nabla f(s + \mathbf{w}_s, t+1)^T \mathbf{d}\mathbf{w}_s + f_t(s, \mathbf{w}_s)], \quad (2)$$

$$H_2 \triangleq \sum_{\langle s, r \rangle \in \mathcal{C}} \rho_2 [\|(\mathbf{w}_s + \mathbf{d}\mathbf{w}_s) - (\mathbf{w}_r + \mathbf{d}\mathbf{w}_r)\|], \quad (3)$$

where $\alpha > 0$, \mathcal{C} is the set of neighboring site pairs lying on grid S equipped with some neighborhood system ν , $f_t(s, \mathbf{w}_s) \triangleq f(s + \mathbf{w}_s, t+1) - f(s, t)$ is now the displaced frame difference, and ρ_1 and ρ_2 are standard *robust M-estimators* (with hyper-parameters σ_1 and σ_2). Such functions penalize the *deviations* both from the data model (i.e., the OFCE) and from the first-order smoothing prior.

The dense estimator (1-3) is general; it is only based on the assumptions of luminance conservation (first term) and of spatial smoothness of the velocity (second term). It does not rely on any prior knowledge about typical fluid flows.

In most situations, it is relevant to consider that fluid motion is composed of three parts: a *smooth laminar component*, a divergence-free component stemming from a *few*

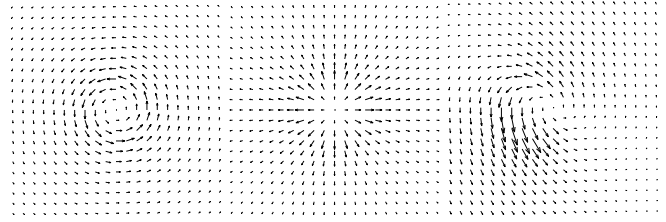


Figure 1. Example of vortex ($\text{rot}_i > 0$), source ($\text{div}_i > 0$), and translated swirl with shear ($a_i, b_i, \text{rot}_i, \text{div}_i$ and $\text{shear}_i \triangleq \sqrt{(c_i - f_i)^2 + (e_i + d_i)^2} > 0$).

vortices, and an irrotational component produced by a *few sinks/sources*. Vortices correspond to localized concentrations of vorticity $\text{rot}\mathbf{w} \triangleq u_x - u_y$, whereas sinks and sources are associated to analog concentrations of divergence $\text{div}\mathbf{w} \triangleq u_x + v_y$.

Extending Rankine vortex model [14], we introduce an original unified modeling of these entities. Let a vortex/sink/source be located at $s_i = (x_i, y_i)$. In a certain neighborhood of s_i , the velocity field is approximated by a linear model. Beyond this neighborhood, the same linear expression is kept, but scaled by the inverse of the squared distance to s_i . Assuming a circular neighborhood D_i of radius r_i around s_i , we thus consider the following parametric velocity field:

$$\mathbf{w}_i(s) \triangleq \min\left(1, \frac{r_i^2}{\|s - s_i\|^2}\right) \cdot \left(\begin{bmatrix} a_i \\ b_i \end{bmatrix} + \begin{bmatrix} c_i & d_i \\ e_i & f_i \end{bmatrix} \begin{bmatrix} x - x_i \\ y - y_i \end{bmatrix} \right), \quad \text{for } s = (x, y) \in S. \quad (4)$$

One can verify that the divergence and the vorticity of this field decrease as $\|s - s_i\|^{-2}$ beyond D_i , and they respectively amount to $\text{div}_i \triangleq c_i + f_i$ and $\text{rot}_i \triangleq e_i - d_i$ within this disk. Vortices correspond to significantly non-zero values of rot_i . Significant positive (resp. negative) values of div_i correspond to sources (resp. sinks). Both situations can be combined within swirls. See examples in Figure 1.

If K vortices/sinks/sources are present, the total field results from the sum of all \mathbf{w}_i 's with some laminar flow which “transports” them. We make interact these different modeling ingredients with the dense field through a robust goodness-of-fit cost function:

$$H_3(\mathbf{d}\mathbf{w}, \mathbf{w}_{lam}, \theta_1 \cdots \theta_K; \mathbf{w}) \triangleq \sum_s \rho_3 [\| \mathbf{w}_s + \mathbf{d}\mathbf{w}_s - (\mathbf{w}_{lam}(s) + \sum_{i=1}^K \mathbf{w}_i(s)) \|] \quad (5)$$

where \mathbf{w}_{lam} denotes the laminar part of the flow and $\theta_i \triangleq (s_i, r_i, a_i, b_i, c_i, d_i, e_i, f_i)^T$ gathers the parameters relative to the i th vortex/sink/source.

3 Joint Estimation

Due to the classical choice of non-convex robust functions, the overall energy function may be highly non-convex. Appropriated minimization schemes must be designed to solve this problem. According to a reformulation of the M -estimator, the minimization may be easily handled in an alternate way.

Assuming certain simple conditions (mainly concavity of $\phi(v) \triangleq \rho(\sqrt{v})$, see [3, 4, 8] for a complete account), any multidimensional minimization problem of the form “find $\arg \min_x \sum_i \rho(g_i(x))$ ” can be turned into a “semi”-quadratic minimization problem “find $\arg \min_{x,z} \sum_i [\tau z_i g_i(x)^2 + \psi(z_i)]$ ” involving *auxiliary variables* (or *weights*) z_i ’s continuously lying in $(0, 1]$. ψ is an increasing function, depending on ρ , and $\tau \triangleq \lim_{v \rightarrow 0^+} \phi'(v)$. Function ψ may be easily computed from ρ but it is never used in practice. The new minimization is usually led *alternatively* with respect to x and to the z_i ’s. The expression being quadratic w.r.t. x if the g_i ’s are linear, the corresponding minimization is conducted through a standard *weighted least squares* minimization. In turn x being frozen, the best weights are given by the following closed form [4, 8]:

$$\hat{z}_i(x) = \frac{\rho'[g_i(x)]}{2\tau x} = \frac{1}{\tau} \phi'[g_i(x)^2]. \quad (6)$$

The overall alternate procedure constitutes an *iteratively reweighted least squares* estimation.

Applying, these reformulations to our energy function $H_1 + \alpha H_2 + \gamma H_3$ (with γ being some positive parameter) leads to the new global energy function $\mathcal{H} \triangleq \mathcal{H}_1 + \alpha \mathcal{H}_2 + \gamma \mathcal{H}_3$ where:

$$\begin{aligned} \mathcal{H}_1 &\triangleq \sum_{s \in S} \delta_s [\nabla f(s + \mathbf{w}_s, t+1)^T \mathbf{d}\mathbf{w}_s + f_t(s, \mathbf{w}_s)]^2 + \psi_1(\delta_s), \\ \mathcal{H}_2 &\triangleq \sum_{\langle s, r \rangle \in \mathcal{C}} \beta_{sr} \|(\mathbf{w}_s + \mathbf{d}\mathbf{w}_s) - (\mathbf{w}_r + \mathbf{d}\mathbf{w}_r)\|^2 + \psi_2(\beta_{sr}), \\ \mathcal{H}_3 &\triangleq \sum_{s \in S} \xi_s \|\mathbf{w}_s + \mathbf{d}\mathbf{w}_s - (\mathbf{w}_{lam}(s) + \sum_{i=1}^K \mathbf{w}_i(s))\|^2 + \psi_3(\xi_s). \end{aligned}$$

The appearing auxiliary variables δ_s ’s and ξ_s ’s ly within $(0, 1]$. They are attached to the image grid and they respectively account for the data model violations and for the “likeness” degree of the estimated dense field to its parametric representation. The other variables β_{sr} ’s are attached to the dual edge grid; they capture the spatial discontinuities of velocity between adjacent sites.

Assuming that \mathbf{w} and \mathbf{w}_{lam} are available in some way, the estimation of $\mathbf{d}\mathbf{w}$, K , $\theta_1 \cdots \theta_K$, and the different

weights is conducted in an alternate way. For a fixed increment field and parametric representation, the minimization of \mathcal{H} with respect to the auxiliary variables is explicitly given by equation (6).

In turn, considering given weights and parametric representation of the velocity field, the minimization with respect to $\mathbf{d}\mathbf{w}$ amounts to solving a standard weighted least squares problem. This is conducted here by extending an efficient multi-parametric adaptive multigrid technique introduced in [13].

As for the parametric model estimation, we have to estimate the number of sink/sources/vortices, the size of the disks supporting the linear models of the flow and the affine model assigned to each of them. For a given dense field from which laminar component is removed $\mathbf{w} + \mathbf{d}\mathbf{w} - \mathbf{w}_{lam} = (u, v)^T$, sinks, sources and vortices should be *singular points* which can be extracted in different ways. As in [5], we use *winding numbers*. The winding number (or index) of a closed curve in a vector field amounts to the number of turns, $\frac{1}{2\pi} \oint d(\tan^{-1} u/v)$, that the field undergoes along the curve. Its value is +1 iff the considered Jordan curve surrounds a vortex/sink/source. Such an index is computed around each pixel using a small closed curve. Around each vortex/sink/source, a small blob (whose size depends on the size of used curve) of +1-index pixels is obtained. The number of blobs is K , and the center of the i th blob provides s_i .

At this stage it remains to estimate radii r_i , and parameters $(a_i \cdots f_i)$ for each i . For a given radius r_i , the minimization of H_3 w.r.t. $(a_i \cdots f_i)$ is a non-linear least-squares problem that can be readily solved using iteratively reweighted least-squares. Minimization of H_3 w.r.t. radius r_i is more involved. Gradient descent techniques could be used to this end. Instead, we designed a simpler heuristic. It is reminiscent to the approach in [10] where one tries to find a compromise between the most robust linear regression (using a large neighborhood) and the less biased regression (not using a neighborhood larger than the actual “linearity” domain). Starting from a small value of r_i , we make it grow. For each new value of r_i , the associated parameters $(a_i \cdots f_i)$ are computed. If the corresponding singular point :

$$\begin{bmatrix} x_c \\ y_c \end{bmatrix} = \begin{bmatrix} x_i \\ y_i \end{bmatrix} + \begin{bmatrix} c_i & d_i \\ e_i & f_i \end{bmatrix}^{-1} \begin{bmatrix} a_i \\ b_i \end{bmatrix}$$

remains within the concerned blob of +1-index pixels, the estimation is considered as reliable, and we proceed. If not the procedure is stopped and the previous value of r_i is selected. The K parametric models defined through the θ_i ’s interact via \mathcal{H}_3 . Using a block Gauss-Seidel minimization

we update them iteratively according to:

$$\theta_i = \left[\sum_{s \in D_i} \xi_s (P_i(s)^T P_i(s)) \right]^{-1} \sum_{s \in D_i} \xi_s P_i(s)^T (\mathbf{w}_s + \mathbf{d}\mathbf{w}_s - \left[\mathbf{w}_{lam}(s) + \sum_{k \neq i} P_k(s) \theta_k \right]) \quad (7)$$

where $P_i(s) \triangleq \begin{bmatrix} 1 & 0 & x - x_i & y - y_i & 0 & 0 \\ 0 & 1 & 0 & 0 & x - x_i & y - y_i \end{bmatrix}$, for $s = (x, y)$.

So far, laminar component \mathbf{w}_{lam} , and dense field to be refined \mathbf{w} were assumed as given. As usual in incremental multiresolution techniques, the latter one is provided, via simple interpolation, by the dense field finally estimated at previous resolution. As for the laminar component, it could simply be considered as a global translation to be estimated in some way [14]. We tried to be less restrictive. The laminar field is taken as the velocity field estimated at the coarsest resolution with the coarsest estimation grid of the multigrid technique proposed in [13]. This very smooth field is then properly interpolated on the current resolution.

4 Experiments

We report here experiments on the three different kinds of Meteosat images: the infrared channel, the visible channel and the water vapor channel (Fig. 2 and 3). In these experiments we used the same robust function in the three energy terms (namely $\rho(x) = 1 - \exp(-\frac{x^2}{\sigma})$). As for the parameter values we used the same ones in all the experiments (except for the visible image sequence where we imposed a higher regularization term). In the three cases the velocity fields seem physically plausible; they are also in accordance with what can be expected based on simple visual inspection of the sequences.

Let us notice the essential role played by the laminar flow. Indeed, in situations where there is a large global motion (such as in the water vapor sequence Fig. 2a), taking this “transport” field into consideration allows to recover accurately the location of depressions despite the displacement of their centers, and to extract secondary vortices which would be lost in the whole flow otherwise (see the vortex in the lower right corner of the water vapor image in Fig 2a).

The combination of the different flow representations provides very interesting results. The parametric field allows to get a physical interpretation of the flow. For example, the main swirls (corresponding to depressions), as well as counter-vortices are well captured. A sink and a source can also be seen in the right lower corner of the infrared

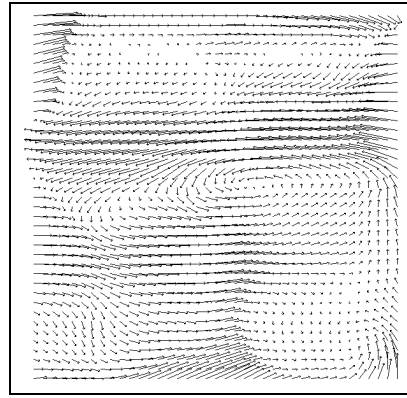


Figure 4. Flow computed with the generic model [13] on the visible image (similar set of parameter)

sequence (Fig. 3). Beside these structures of interest captured by the parametric field, complex and less structured information is carried by the laminar component and the estimated dense velocity field.

It is also interesting to point out the benefit of the parametric modeling in areas with low photometric gradient. Indeed, in these areas (as well as in regions with many data outliers) velocity fields estimated by the way of generic motion estimator (equ. 1) are poorly constrained and the non-linear smoothness term tends to introduce inexistent discontinuities around and within these regions (see Fig. 4). By contrast, the parametric prior introduced here circumvents in an elegant way this problem: In such areas, the field is not only dependent on the spatial context, it is also guided toward a smooth solution having much more physical sense (see Fig. 2b).

5 Conclusion

In this paper we have proposed a method to estimate fluid flows. This method relies on the extension of a generic robust motion estimator. This extension consists in considering in a coupled way the estimation of the velocity field and of some structures of interest which are explanatory to the unknown flow. The method has been tested on the three kinds of Meteosat satellite images. The recovered flows seem to be in accordance with the underlying phenomena. Compared to classical (first-order regularization based) optical-flow estimators, this method allows a more robust estimation in large areas of low photometric contrast and a better extraction of highly diverging or swirling motions. Finally, the method provides simultaneously a dense estimation of the flow and a structured parametric representation which is believed to retain relevant physical information.

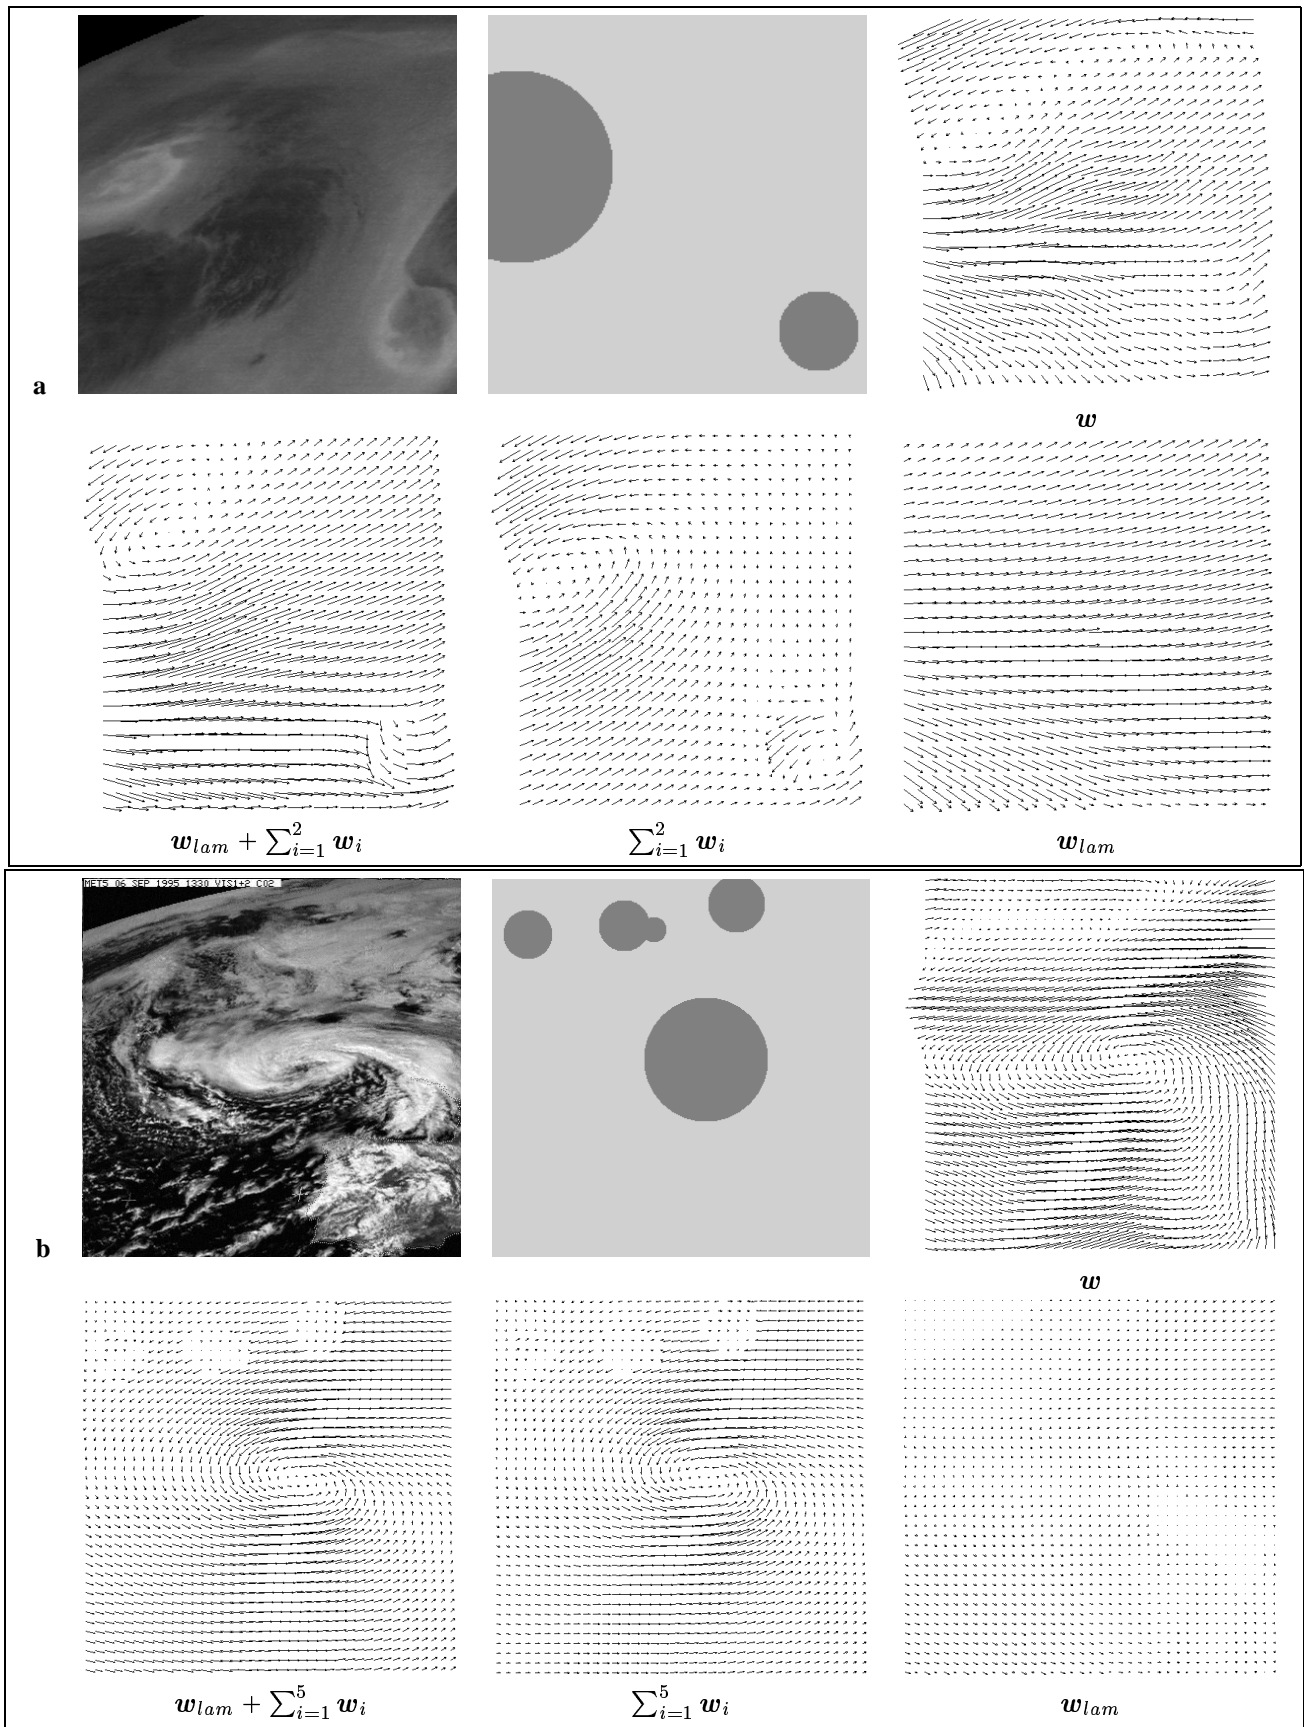


Figure 2. Result sample on satellite Meteosat images: (a) water vapor images and (b) visible images; extracted vortices/sinks/sources $(\{s_i, r_i\}_{i=1}^K)$, with $K = 2$, resp. 5; estimated dense fields w ; estimated parametric and laminar fields $w_{lam} + \sum_{i=1}^K w_i$; parametric field alone $\sum_{i=1}^K w_i$; laminar field alone w_{lam} .

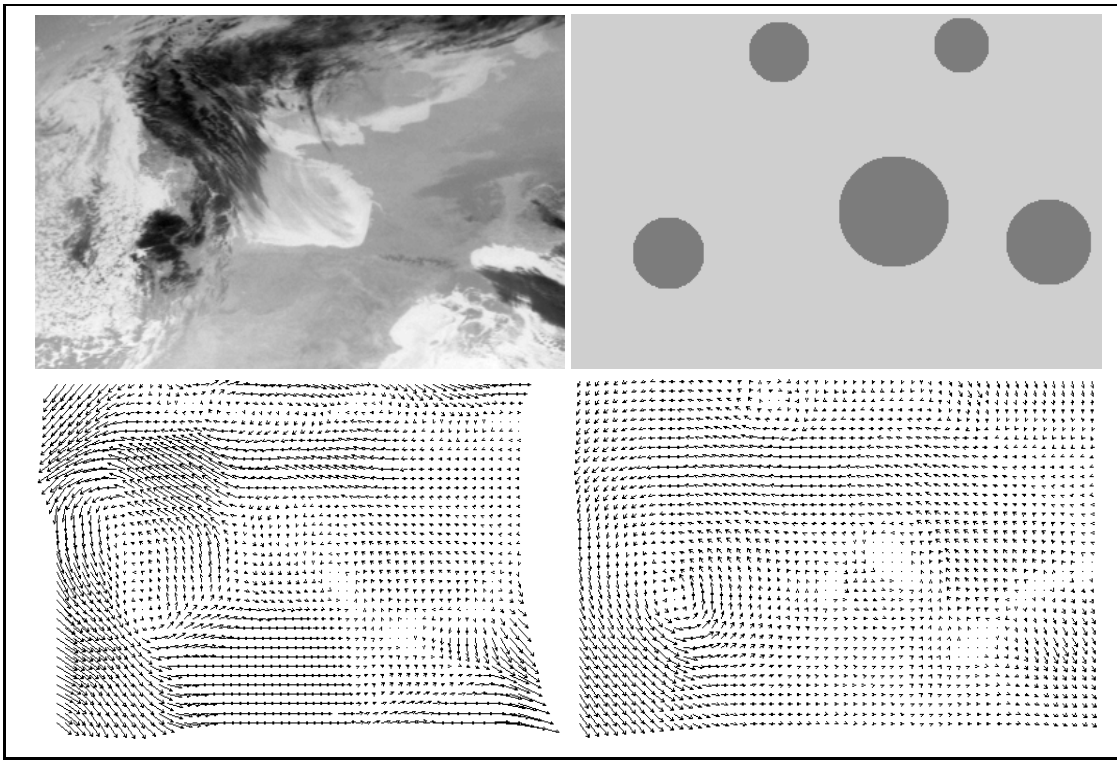


Figure 3. Results on infrared satellite Meteosat images; extracted vortices/sinks/sources $(\{s_i, r_i\}_{i=1}^K)$, with $K = 5$; estimated dense fields \mathbf{w} ; estimated parametric and laminar fields $\mathbf{w}_{lam} + \sum_{i=1}^K \mathbf{w}_i$.

References

- [1] J. Bergen, P. Anandan, K. Hanna, and R. Hingorani. Hierarchical model-based motion estimation. In *ECCV'92*, volume 558 of *LNCS*, pages 237–252. Springer-Verlag, 1992.
- [2] M. Black and P. Anandan. The robust estimation of multiple motions: parametric and piecewise-smooth flow fields. *CVIU*, 63(1):75–104, 1996.
- [3] M. Black and A. Rangarajan. On the unification of line processes, outlier rejection, and robust statistics with applications in early vision. *IJCV*, 19(1):75–104, 1996.
- [4] P. Charbonnier, L. Blanc-Féraud, G. Aubert, and M. Barlaud. Deterministic edge-preserving regularization in computed imaging. *IEEE Trans. Im.Proc.*, 6(2):298–311, 1997.
- [5] I. Cohen and I. Herlin. Optical flow and phase portrait methods for environmental satellite image sequences. In *ECCV'96*, pages II:141–150, Cambridge, UK, Apr. 1996.
- [6] W. Enkelmann. Investigation of multigrid algorithms for the estimation of optical flow fields in image sequences. *CVGIP*, 43:150–177, 1988.
- [7] R. Ford and R. Strickland. Representing and visualizing fluid flow images and velocimetry data by nonlinear dynamical systems. *Graph. Mod. Im. Proc.*, 57(6):462–482, 1995.
- [8] D. Geman and G. Reynolds. Constrained restoration and the recovery of discontinuities. *IEEE Trans. PAMI*, 14(3):367–383, 1992.
- [9] R. Larsen, K. Conradsen, and B. Ersboll. Estimation of dense image flow fields in fluids. *IEEE. Trans. Geo. and Remote Sensing*, 36(1):256–264, 1998.
- [10] M. Maurizot, P. Bouthemy, and B. Delyon. 2d fluid motion analysis from a single image. In *CVPR*, pages 184–189, Santa Barbara, June 1998.
- [11] E. Mémin and P. Pérez. Dense estimation and object-based segmentation of the optical flow with robust techniques. *IEEE Trans. Im. Proc.*, 7(5):703–719, 1998.
- [12] E. Mémin and P. Pérez. Joint estimation-segmentation of optic flow. In *ECCV'98*, Freiburg, Germany, June 1998.
- [13] E. Mémin and P. Pérez. A multigrid approach to hierarchical motion estimation. In *ICCV'98*, Bombay, India, Jan. 1998.
- [14] H. Nogawa, Y. Nakajima, and Y. Sato. Acquisition of symbolic description from flow fields: a new approach based on a fluid model. *IEEE Trans. PAMI*, 19(1), 1997.
- [15] J. Wallace and J. Foss. The measurement of vorticity in turbulent flows. *Annu. Rev. Fluid Mech.*, 27:469–514, 1995.
- [16] J. Zhong, T. Huang, and R. Adrian. Extracting 3D vortices in turbulent flow. *IEEE Trans. PAMI*, 20(2):193–199, 1998.